

Instructions of mobile phone client

Directory

Chapter One Instructions of Android.....	3
§1.1 Essential condition.....	3
§1.2 Installation and operation instructions.....	3
§1.3 Login interface.....	4
§1.3.1 Login interface.....	4
§1.3.2 User register.....	4
§1.3.3 Retrieve the password.....	5
§1.4 Real-time preview.....	6
§1.5 Device management.....	9
§1.5.1 Modify the connection parameter.....	10
§1.5.2 Modify the name.....	10
§1.5.3 Delete.....	11
§1.5.4 Add the catalogue.....	11
§1.5.5 Add the device.....	12
§1.5.6 Add the shot.....	12
§1.5.7 Search the local device.....	13
§1.6 Playback.....	14
§1.7 Alarm management.....	14
§1.7.1 Guard.....	15
§1.7.2 Unguard.....	16
§1.7.3 Note.....	16
§1.7.4 Record.....	17
§1.8 Local playback.....	18
§1.9 Image view.....	18
§1.10 Modify password.....	19
§1.11 Local configuration.....	20

§1.12 Help.....	20
§1.12.1 Help.....	21
§1.12.2 Version Info.....	22
§1.13 Login out.....	23
Chapter Two Instructions of iPhone.....	24
§2.1 Essential condition.....	24
§2.2 Installation and operation instructions.....	25
§2.3 Login register.....	25
§2.3.1 Login interface.....	25
§2.3.2 User register.....	26
§2.3.3 Retrieve the password.....	27
§2.4 Real-time preview.....	28
§2.5 Device management.....	31
§2.5.1 Modify the connection parameter.....	32
§2.5.2 Modify the name.....	33
§2.5.3 Delete.....	34
§2.5.4 Add the catalogue.....	34
§2.5.5 Add the device.....	35
§2.5.6 Add the shot.....	36
§2.5.7 Search the local device.....	36
§2.6 Playback.....	37
§2.7 Alarm management.....	37
§2.7.1 Guard.....	38
§2.7.2 Unguard.....	39
§2.7.3 Note.....	39
§2.7.4 Record.....	40
§2.8 Local playback.....	41
§2.9 Image view.....	42
§2.10 Modify password.....	43
§2.11 Local configuration.....	43

This cloud service platform is the best mobile phone video during the internet era. It consists of front-end acquisition devices, platform servers, and remote view of three parts.

1) The acquisition of client software:

The client software can be got from the CD material equipped with CD, then choose English and select the options supporting tools, finally choose the mobile phone monitoring or obtained from technical support. Each type of corresponding client software as follows.

A) **QMEYE.apk**: The smart phone monitoring client of Android operating system

B) **QMEYE.ipa**: The smart phone monitoring client of phone operating system

2) The instructions of three platforms is shown as follows.

A) android

B) iphone

Chapter One Instructions of Android

§1.1 Essential condition

1) Support the version 2.2 or above of Android system.

2) Support DVR platform versions:

➤ Hisilicon v2.0.0.81 and higher.

§1.2 Installation and operation instructions

Installation

Support two installation modes and the user can choose one way for installation.

1. Install online

Search QMEYE on himarket or google play and install online.

2. Install offline

Copy the QMEYE.apk installation package to Android phone through cable. In the specified directory find out the corresponding .apk , click the application installation (If

there is not installed apk installer in the mobile phone, the user needs to download an apk installation software so that it can identify the apk package), and there will be program icons after finishing installing.

§1.3 Login interface

§1.3.1 Login interface

Open the software into the login interface, inputting the username and password and click button “login”, then it will be login the application.




Icon description:

icon	Function description
	After select, it will go directly to the main menu when you log in again.

§1.3.2 User register

Click the button “register” on the login menu, then will jump to the register interface.

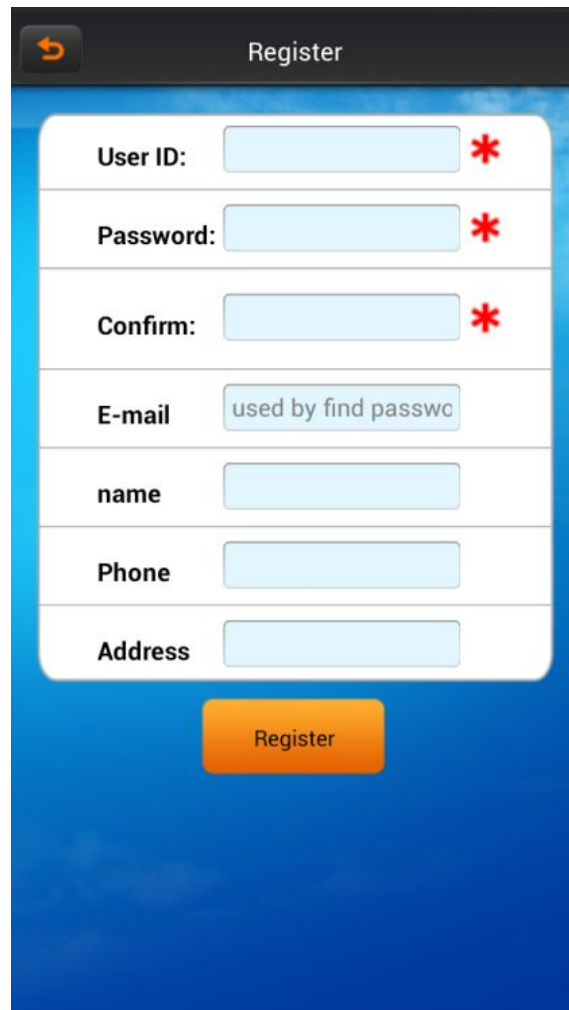A mobile application interface for a registration form. At the top is a dark header with a back arrow icon and the title "Register". Below the header is a white rounded rectangle containing the form fields. The fields are: "User ID:" with a red asterisk, "Password:" with a red asterisk, "Confirm:" with a red asterisk, "E-mail" with a placeholder text "used by find passwc", "name", "Phone", and "Address". Each field has a light blue input box. At the bottom of the white rectangle is an orange "Register" button. The background of the app is a blue gradient with a cloud pattern.

Register

User ID: *

Password: *

Confirm: *

E-mail used by find passwc

name

Phone

Address


Register

Enter the register information, click “register” then will be registered.

Note: please enter the valid E-mail address in order to retrieve your password when you lost it.

§1.3.3 Retrieve the password

On the register clicking the button “login” and jump to “retrieve password” interface.

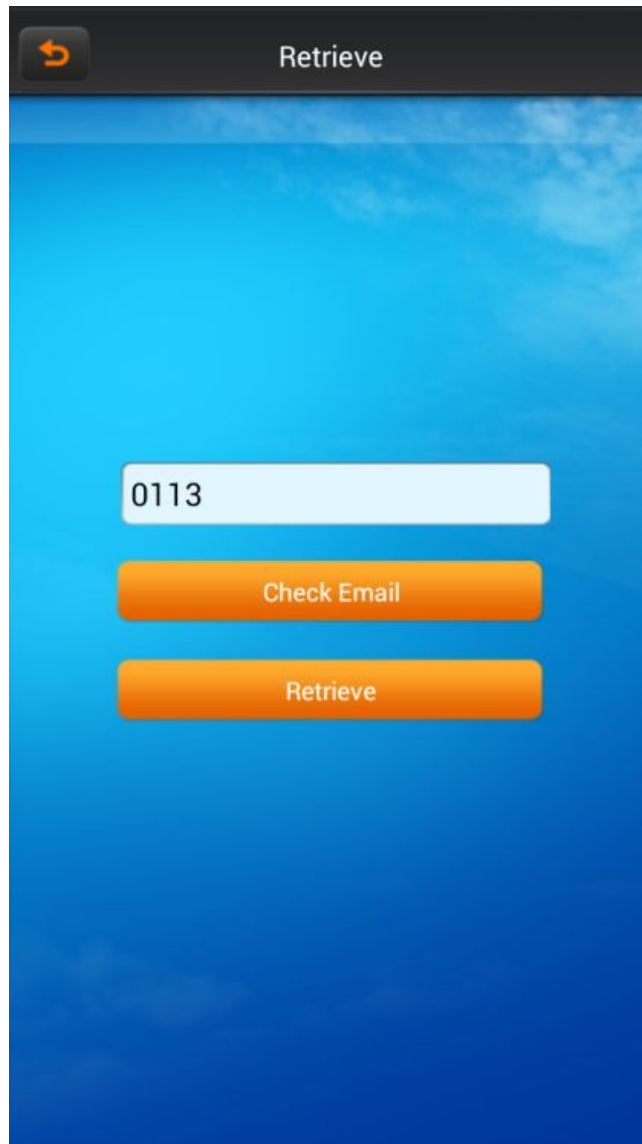


Input the username, click button “retrieve password”.

If you have entered your name and email address when registering and the username has been occupied, then “retrieve password” information will be sent to the email address.

§1.4 Real-time preview


In the main menu, clicking “real-time preview

Click “Favorites” button, go to “collection management” interface

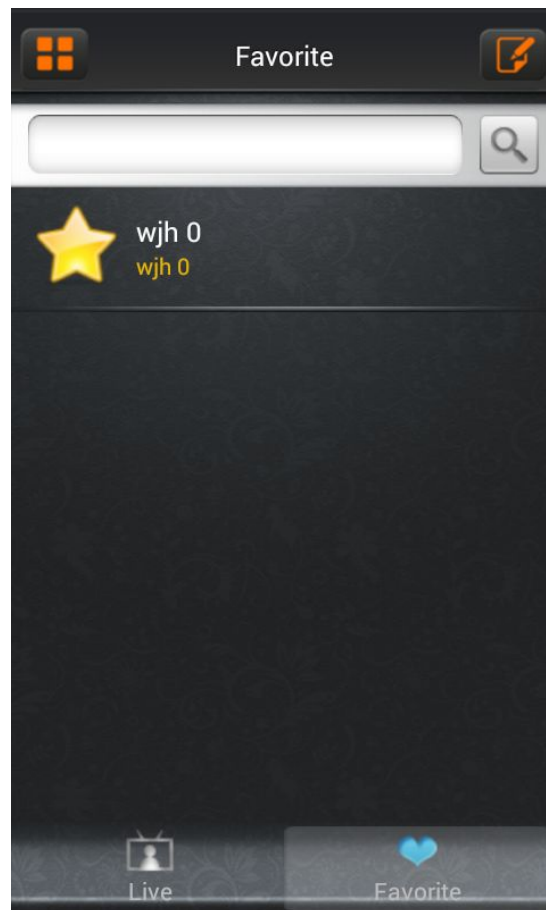

Click on the icon , favorites list change into editing state, click icon , you can delete your favorites.

Select one of the devices on “Live list” enters the video preview interface.

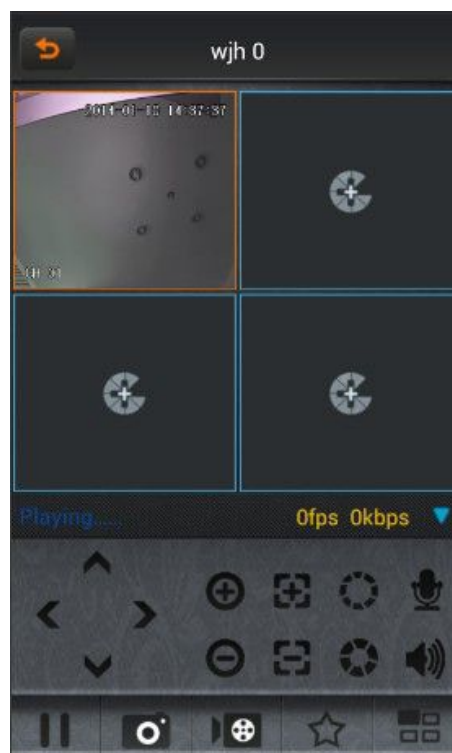


Button instruction:

icons	function instruction
	return to main menu
	move to the left
	move to the right
	move down
	move up
	enlarge
	narrow
	zoom out
	zoom in
	aperture enlarge
	aperture narrow
	start/ close intercom
	start/ close speakers
	stop/ start
	snapshot
	start / close the local video
	favorites
	channel switcher

§1.5 Device management

Click the button” device management” on the main menu and enter “device management” interface.

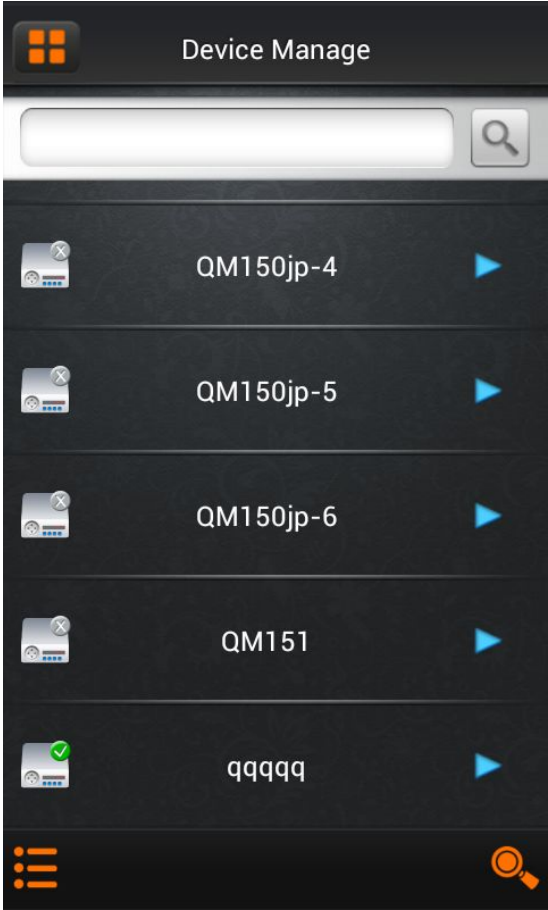

Icon instruction:

Icon	Function instruction
	return to the main menu
	click on the pop-up menu, such as modifying parameters, name options
	shot
	catalogue
	device
	after pop-up, add the catalogue,, device and shot menu

	search the local shot
---	-----------------------

§1.5.1 Modify the connection parameter

Click on the icon , select “modify connect parameter”, then into “modify device” dialog box:



iPod PM 5:52

Modify Device

Name:

Connection Mode: **Cloud** Address

UMID: 

User ID:

Password:

Channel:

Stream Type: **Main** Sub

- A) Click on the icon , return to the device management lists.
- B) Click on the icon , save the current configuration.

§1.5.2 Modify the name

Click on the icon , select the option “modify the name”, then pops up “modify name” or “modify the catalogue” dialog box.



A dialog box titled "Device Name" with a label "Name:" and a text input field containing "cdtest". At the bottom are "Cancel" and "OK" buttons.

- A) Click "OK" button to save the current configuration.
- B) Click "cancel" button to cancel the modifying.

§1.5.3 Delete

Click on icon , select "delete" button to delete the current device directly

§1.5.4 Add the catalogue

Click on icon , select "add the catalogue" option, then pops up "add the catalogue" dialog box



A dialog box titled "Add Node" with a label "Node Name:" and an empty text input field. At the bottom are "Cancel" and "OK" buttons.

- A) Click "OK" button, it will be saved the current configuration. Then will be showed in the device management list.
- B) Click button "Cancel" to cancel to add the catalogue.

§1.5.5 Add the device

Click on the icon to select “add the device” option.



iPod PM 5:54

Device Detail

Name:

Connection Mode: **Cloud** Address

UMID: 

User ID:

Password:

Max Channel: **1** 4 8 16 32

Stream Type: Main **Sub**

Icon instruction

Icon	Function instruction
	Open the camera and shoot the QR code to obtain the data.
	Save the device data
	Cancel to add the device.


§1.5.6 Add the shot

Please see the operation introduction of “add devices”.

§1.5.7 Search the local device

Click on the icon to enter “search” dialog box. If there are some devices in local place, you

would search out the corresponding device.

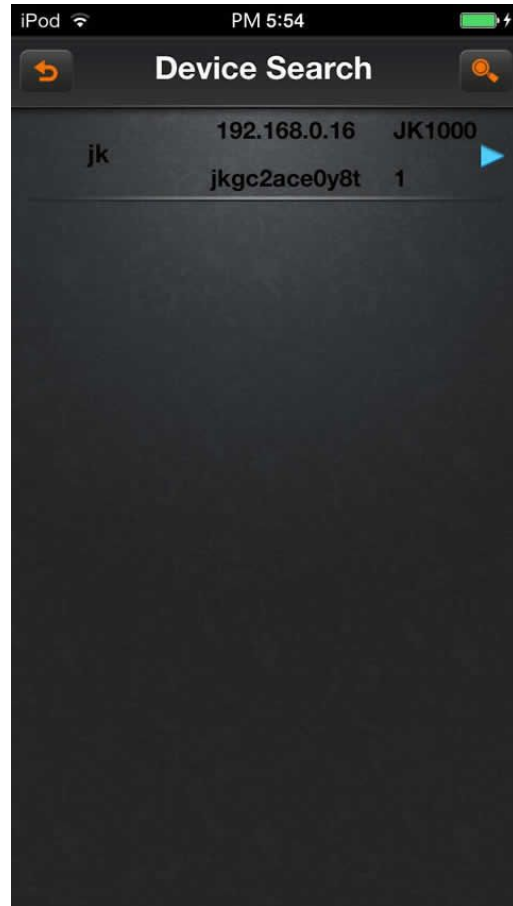

Icon instruction

Icon	Function instruction
	return to device management
	pop up the option of “add menu”
	search the device again


Click on the icon , then pop up the menu as follows:

- A) Add a device: add DVR (multi- channel)
- B) Add a shot: add a single camera (single channel)
- C) Modify the name: modify the name of the device or shot
- D) Modify IP: Modify the IP address, subnet mask, gateway information

E) Modify the device password

§1.6 Playback


Click button “playback” option in the main menu, and then select to playback the video.

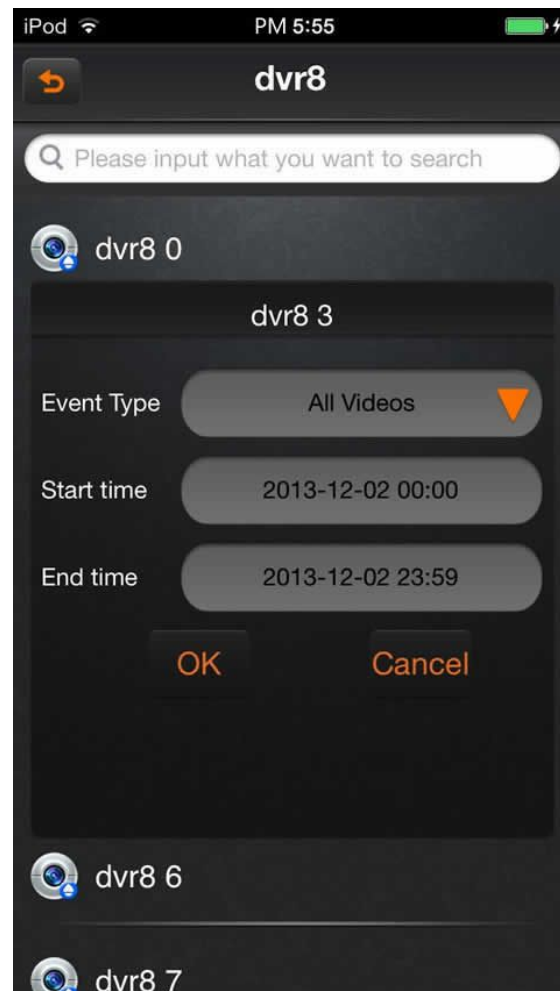

After select an event type, start time and end time, clicking on the icon  will list out the remote video lists, and then click on the item will be selected to play or download videos.

§1.7 Alarm management

Click the option of “alarm management” in the main menu

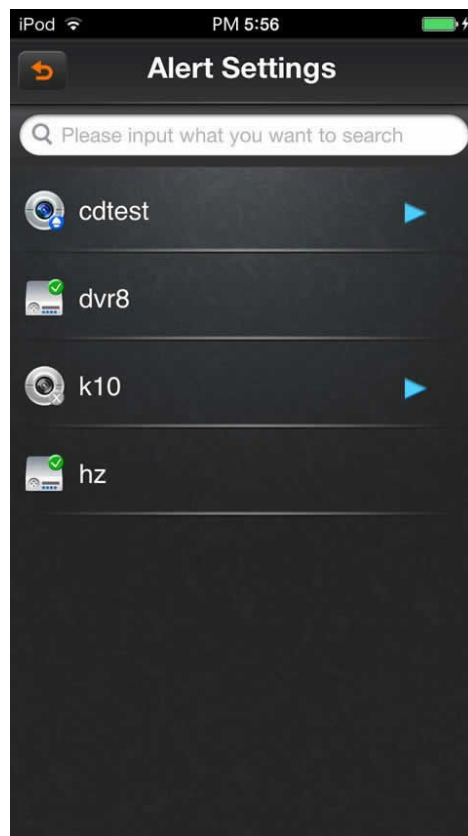


Icon instruction:

Icon	Function instruction
	No guard
	Guarded
	Click the pop-up menu options

§1.7.1 Guard

Click on the icon  to select “guard” option, pop up the dialog box as follows:

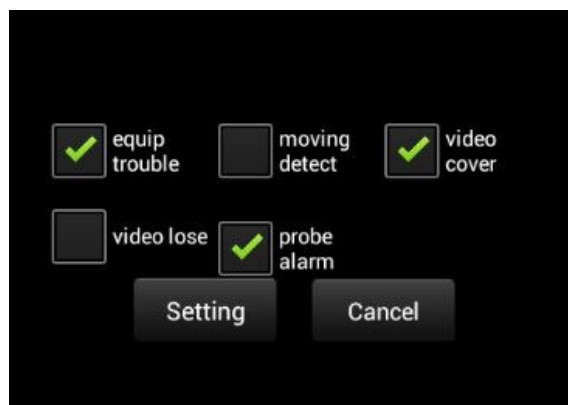


Select the option those need to alarm and click the button “setup” to save the current settings; Click the button “cancel” to cancel the current settings.

§1.7.2 Unguard

Click on the icon  to select the button “unguard”, cancel the current camera setting.

§1.7.3 Note


Click on the icon to select “note” option , and then pop up the dialog as follows:

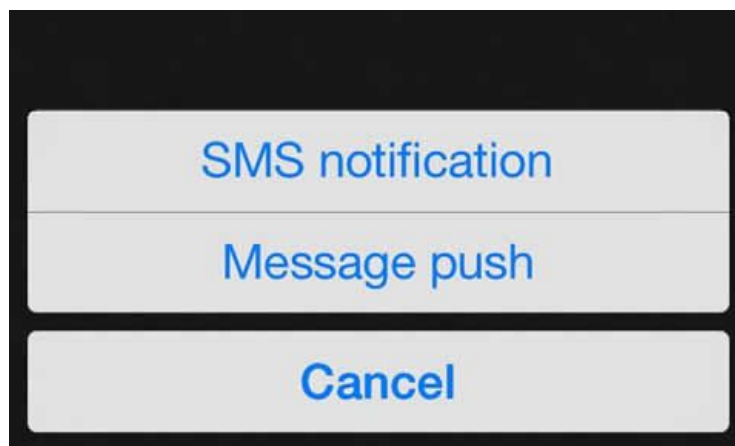

A) SMS notification: set the cell phone number of alarm notification

B) News push: open/ close the news push setting

In the notification interface, and then into “SMS notification” interface

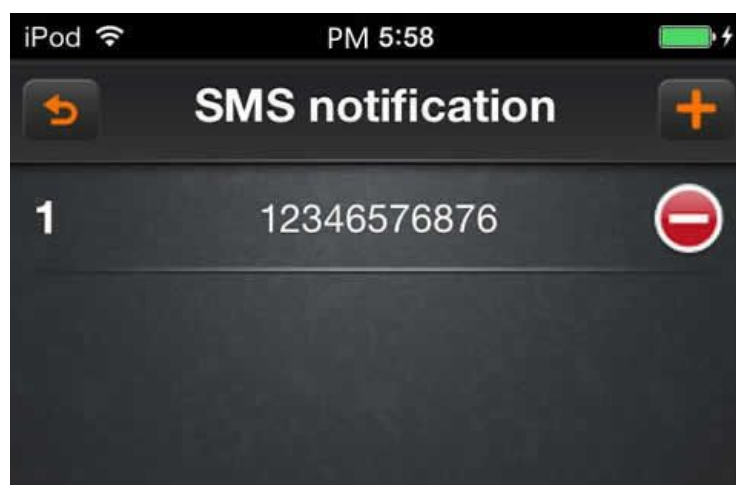


Icon instruction

Icon	Function instruction
------	----------------------

	return to the alarm management
	Add the number of SMS
	Delete the current number

§1.7.4 Record

Click on the icon to select “record” option , and then pop up the dialog of “alarm record”

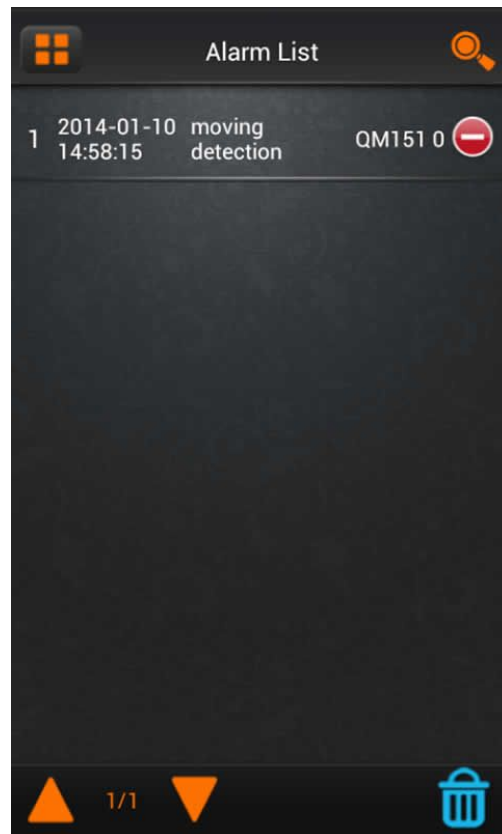

The icons instruction


Icon	Function instruction
	return to the alarm management
	search the alarm record
	page up




page down

§1.8 Local playback

Click on “local playback” option in the main menu, and then into the interface as follows

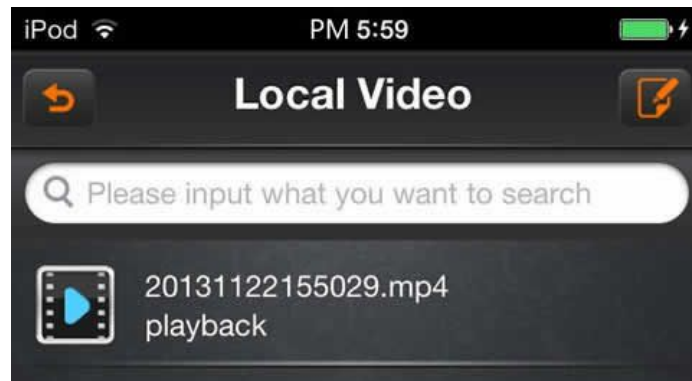

Click on the icon , the local playback video list change to editing states.

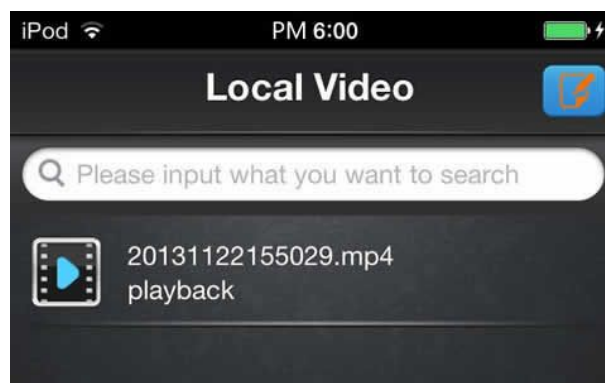

Select the video options that you want to delete, and then click the icon ; you can delete the selected local video.

§1.9 Image view

Click on “images browsing” option



Click on the icon , the local playback video list change to editing states.



Select the image options that you want to delete , and then click on the icon to delete the selected local images.

§1.10 Modify password

Click on" modify password" option in the main menu, and then into the interface as follows:



Click on the icon to save the current modified password.

§1.11 Local configuration

Click on “local configuration” option in the main menu, and then into the interface as follows




Function instruction:

Function	Instruction
PTZ length	The camera rotation rate setting
Do not disturb	Alarm Info Tips switch
Alarm voice	Close the alarm voice

Click on the icon to save the current configuration..


§1.12 Help

Click on “help” option in the main menu, and then into the interface as follows

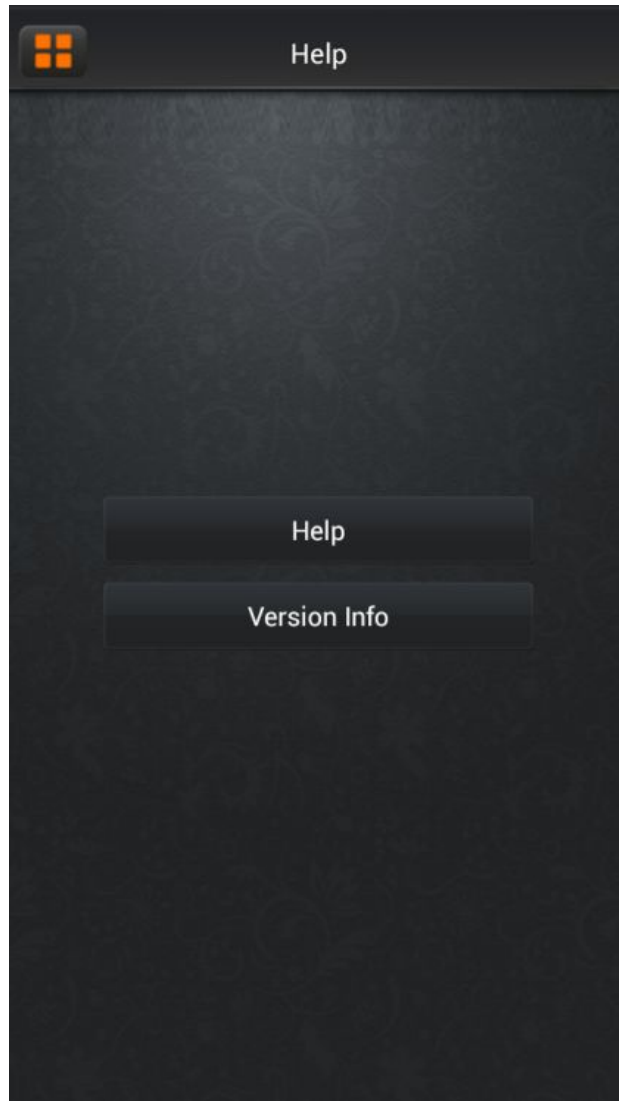

§1.12.1 Help

Click on the button “ Help” , and then into the interface as follows

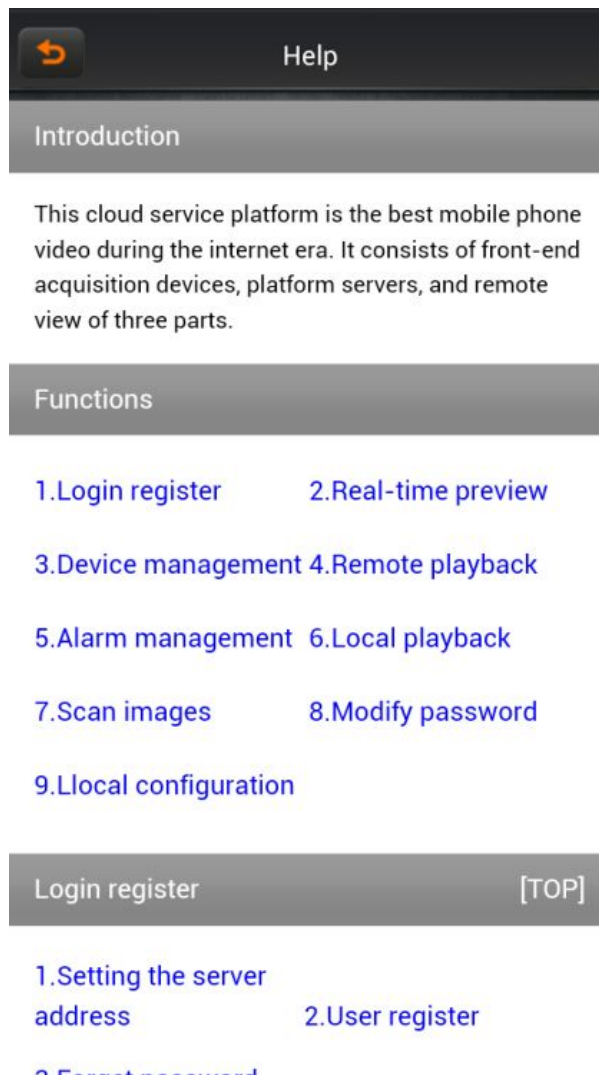


§1.12.2 Version Info

Click on the button “ Help” , and then into the interface as follows



§1.13 Login out

Click on “login out” option in the main menu, and then into the interface as follows

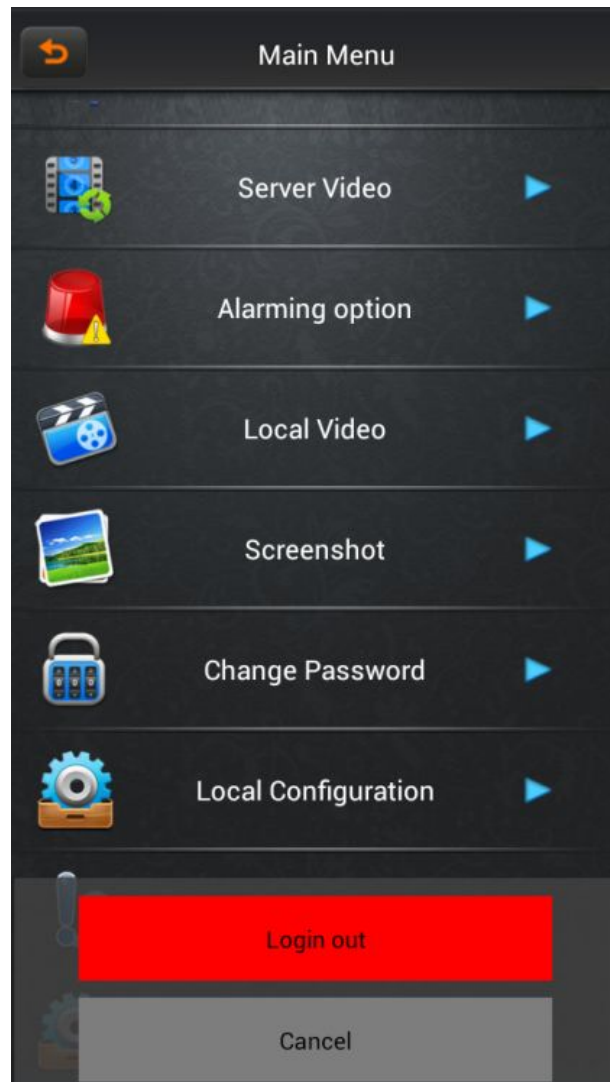

Function instruction:

Function	Instruction
Login out	Log off the current user
Cancel	Cancel log off the current user

Chapter Two Instructions of iPhone

§2.1 Essential condition

- 1) Support the version ios5.0 to ios7.0 of iPhone system.
- 2) Support DVR platform versions:
 - A) Hisilicon v2.0.0.81 and higher.

§2.2 Installation and operation instructions

Installation

Support two installation modes and the user can choose one way for installation.

1. Install online

Run the App Store program of iPhone.

Switch to the search tag page, and input QMEYE in the search box to find the application installation package, then click <install> .After finishing installation, there will be QMEYE program icon on the mobile phone desktop.


2. Install offline

Copy the QMEYE.ipa installation package to Iphone mobile through cable. In the specified directory find out the corresponding .ipa, click the application installation, and there will be program icons after finishing installing.

§2.3 Login register

§2.3.1 Login interface

Open the software into the login interface, inputting the username and password and click button “login”, then it will be login the application.

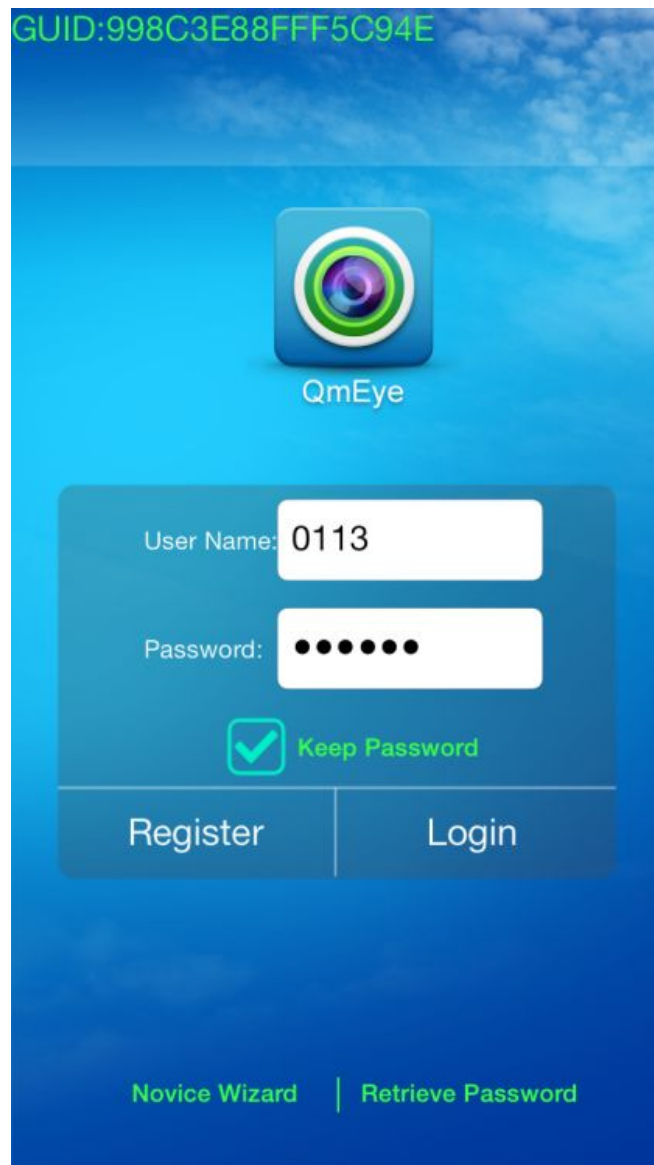


Icon description:

icon	Function description
	After select, it will go directly to the main menu when you log in again.

§2.3.2 User register

Click the button “register” on the login menu, then will jump to the register interface.

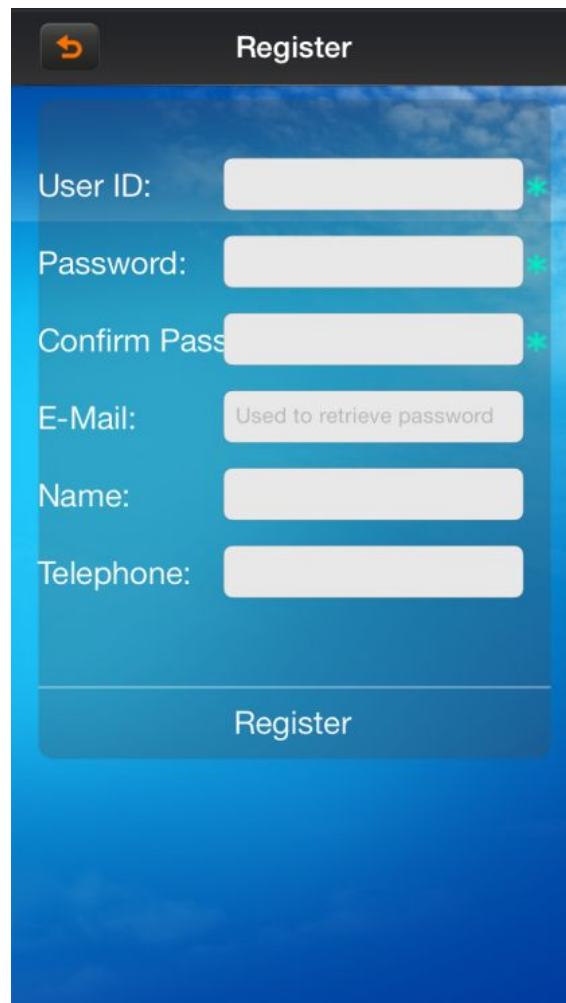A mobile application interface for a registration form. At the top, there is a dark header bar with a back arrow icon on the left and the title "Register" in the center. Below the header, the form is set against a blue background with a subtle cloud pattern. The form contains six input fields, each with a label to its left and a green star icon to its right: "User ID:", "Password:", "Confirm Pass", "E-Mail:", "Name:", and "Telephone:". The "E-Mail:" field has a placeholder text "Used to retrieve password" inside it. At the bottom of the form, there is a large, rounded rectangular button labeled "Register".

Register

User ID:

Password:

Confirm Pass

E-Mail:

Name:

Telephone:


Register

Enter the register information, click “register” then will be registered.

Note: please enter the valid E-mail address in order to retrieve your password when you lost it.

§2.3.3 Retrieve the password

On the register clicking the button “login” and jump to “Retrieve password” interface.

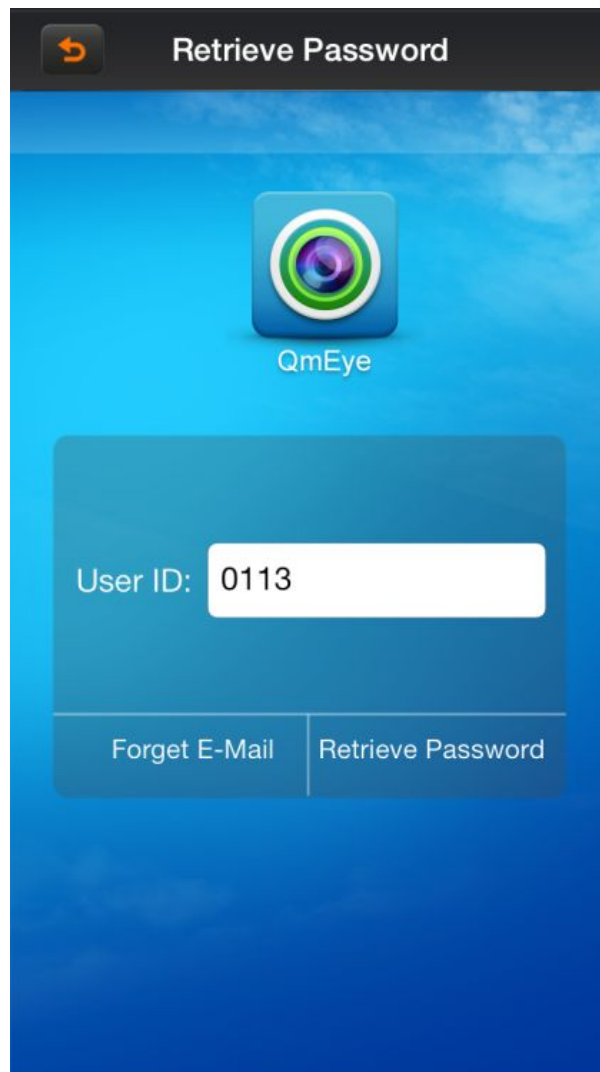


Input the username, click button “retrieve password”.

If you have entered your name and email address when registering and the username has been occupied, then “retrieve password” information will be sent to the email address.


§2.4 Real-time preview

In the main menu, clicking “real-time preview

Click “Favorites” button, go to “collection management” interface

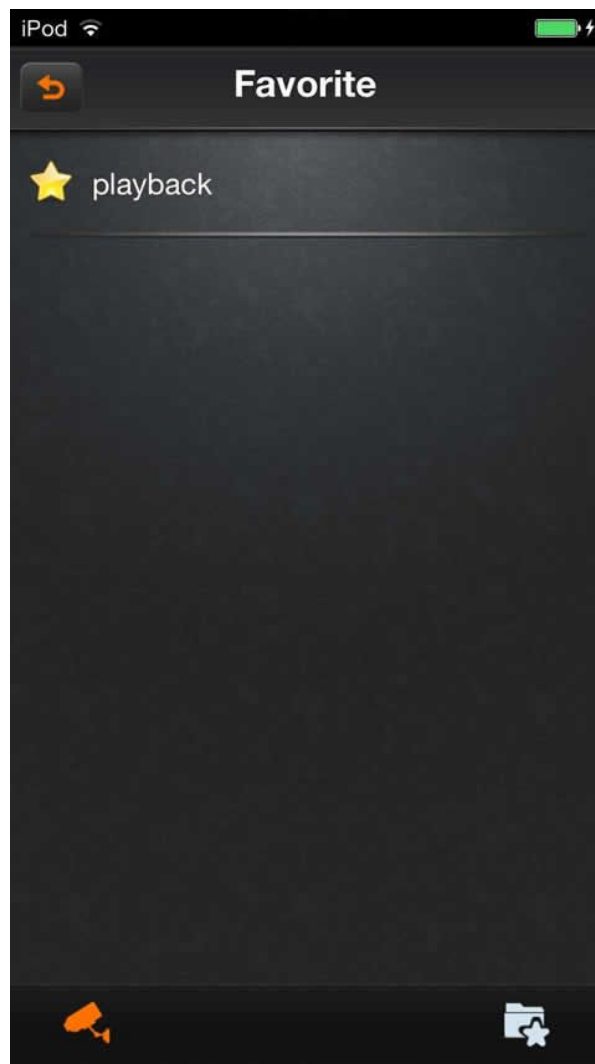

Select one of the devices on “Live list” enters the video preview interface.

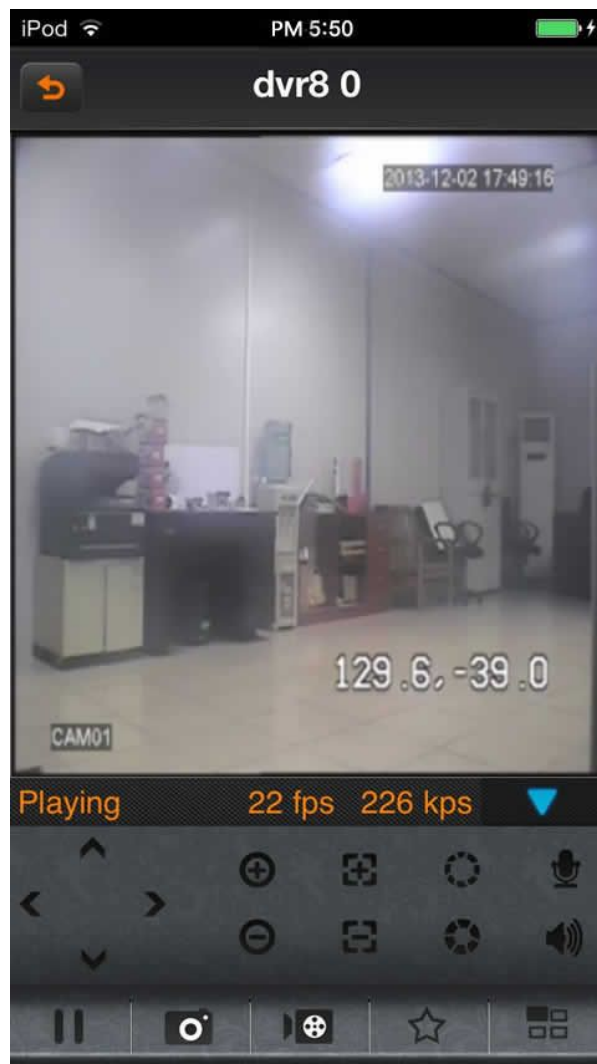


Button instruction:

icons	function instruction
	return to main menu
	move to the left
	move to the right
	move down
	move up
	enlarge
	narrow

	zoom out
	zoom in
	aperture enlarge
	aperture narrow
	start/ close intercom
	start/ close speakers
	stop/ start
	snapshot
	start / close the local video
	favorites
	channel switcher

§2.5 Device management

Click the button” device management” on the main menu and enter “device management” interface.

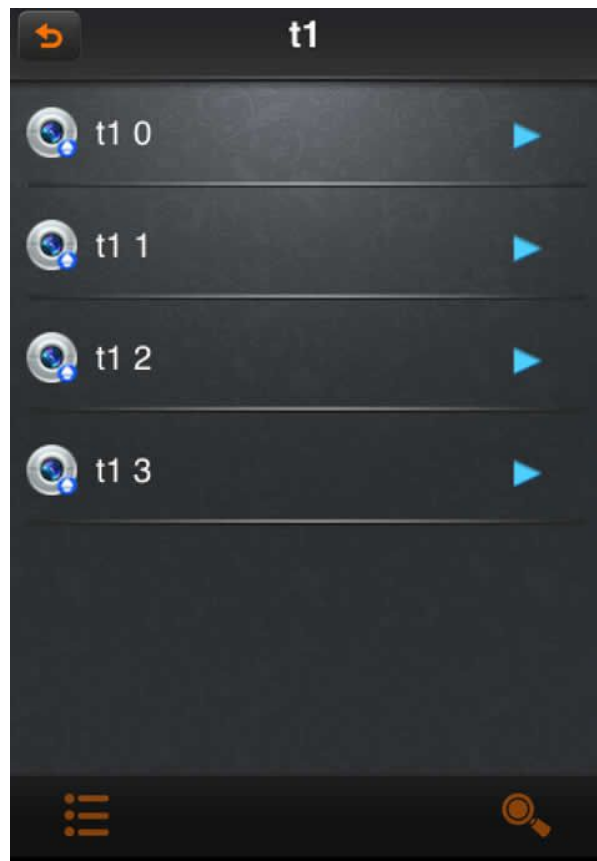


Icon instruction:

Icon	Function instruction
	return to the main menu
	click on the pop-up menu, such as modifying parameters, name options
	shot
	catalogue
	device
	after pop-up, add the catalogue,, device and shot menu
	search the local shot

§2.5.1 Modify the connection parameter

Click on the icon , select “modify connect parameter”, then into “modify device” dialog box:

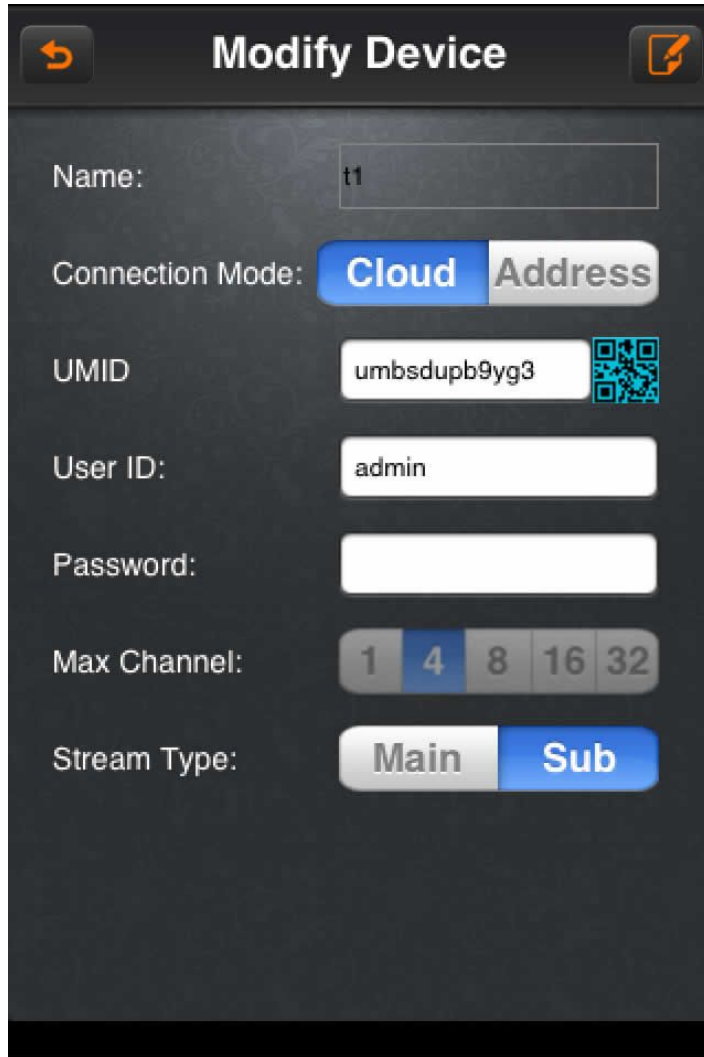

A) Click on the icon , return to the device management lists.

B) Click on the icon , save the current configuration.

§2.5.2 Modify the name

Click on the icon , select the option “modify the name”, then pops up “modify name” or “modify the catalogue” dialog box.




- A) Click “OK” button to save the current configuration.
- B) Click “cancel” button to cancel the modifying.

§2.5.3 Delete

Click on icon , select “delete’ button to delete the current device directly

§2.5.4 Add the catalogue

Click on icon , select “add the catalogue” option, then pops up “add the catalogue” dialog box

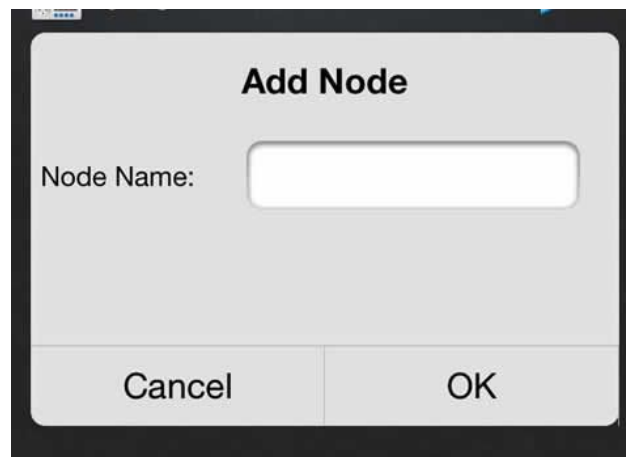

- A) Click “OK” button, it will be saved the current configuration. Then will be showed in the device management list.
- B) Click button “Cancel” to cancel to add the catalogue.

§2.5.5 Add the device

Click on the icon to select “add the device” option.



Device Detail

Name:

Connection Mode:

Cloud

Address

UMID

User ID:

Password:

Max Channel:

1

4

8

16

32

Stream Type:

Main

Sub

Icon instruction


Icon	Function instruction
	Open the camera and shoot the QR code to obtain the data.
	Save the device data
	Return the main menu

§2.5.6 Add the shot

Please see the operation introduction of “add devices”.

§2.5.7 Search the local device

Click on the icon to enter “Device search” dialog box. If there are some devices in local place, you would search out the corresponding device.

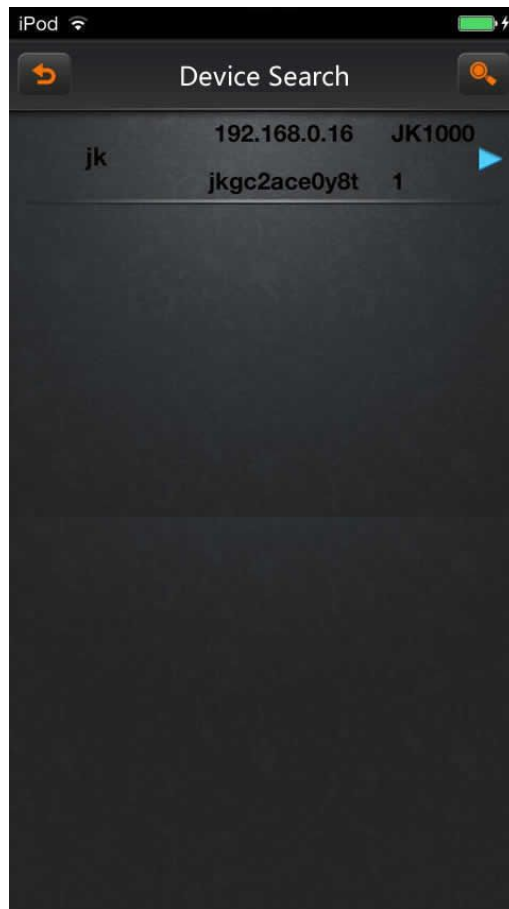

Icon instruction


Icon	Function instruction
	return to device management
	pop up the option of “add menu”
	search the device again

Click on the icon , then pop up the menu as follows:

- A) Add a device: add DVR (multi- channel)
- B) Add a shot: add a single camera (single channel)
- C) Modify the name: modify the name of the device or shot
- D) Modify IP: Modify the IP address, subnet mask, gateway information
- E) Modify the device password

§2.6 Playback


Click button “playback” option in the main menu, and then select to playback the video.

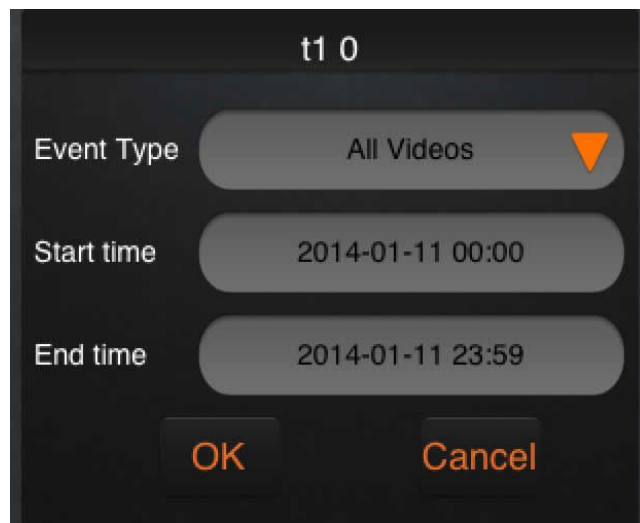

After select an event type, start time and end time, click the button OK will list out the remote video lists, and then click on the item will be selected to play or download videos.

§2.7 Alarm management

Click the option of “alarm management” in the main menu

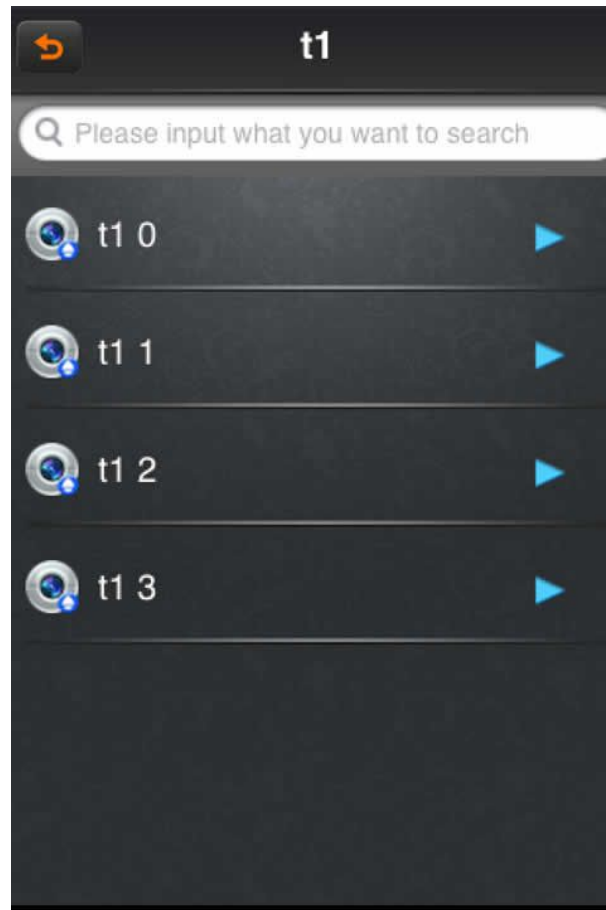


Icon instruction:

Icon	Function instruction
	No guard
	Guarded
	Click the pop-up menu options

§2.7.1 Guard

Click on the icon  to select “guard” option, pop up the dialog box as follows:

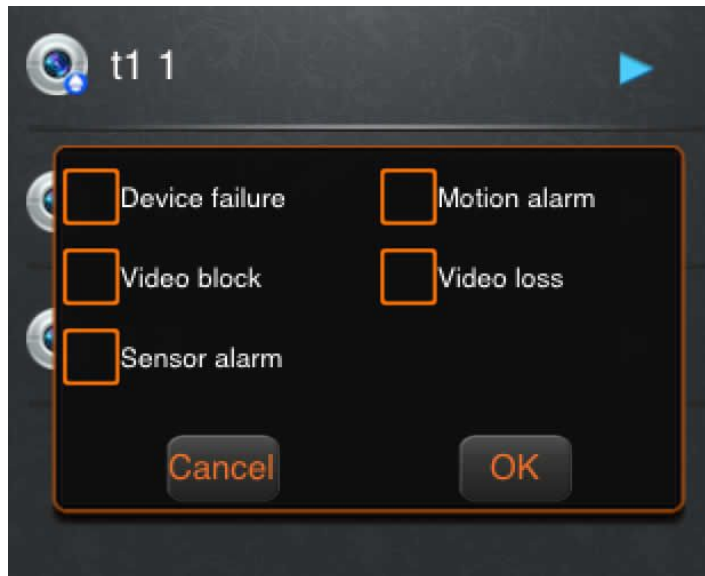


Select the option those need to alarm and click the button “OK” to save the current settings; Click the button “Cancel” to cancel the current settings.

§2.7.2 Unguard


Click on the icon  to select the button “unguard”, cancel the current camera setting.

§2.7.3 Note

Click on the icon to select “note” option , and then pop up the dialog as follows:

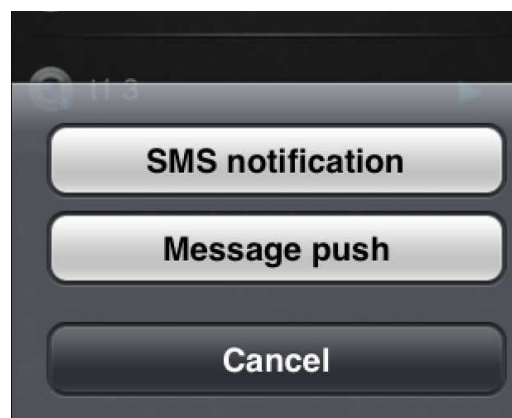

- A) SMS notification: set the cell phone number of alarm notification
 - B) Message push: open/ close the news push setting
- In the notification interface, and then into “SMS notification” interface

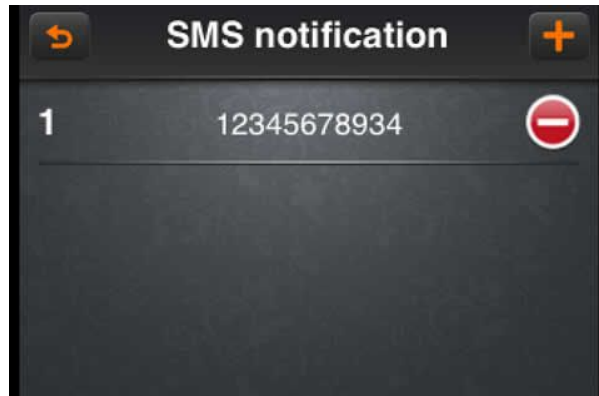


Icon instruction

Icon	Function instruction
	return to the alarm management
	Add the number of SMS
	Delete the current number

§2.7.4 Record

Click on the icon to select “record” option , and then pop up the dialog of “alarm record”

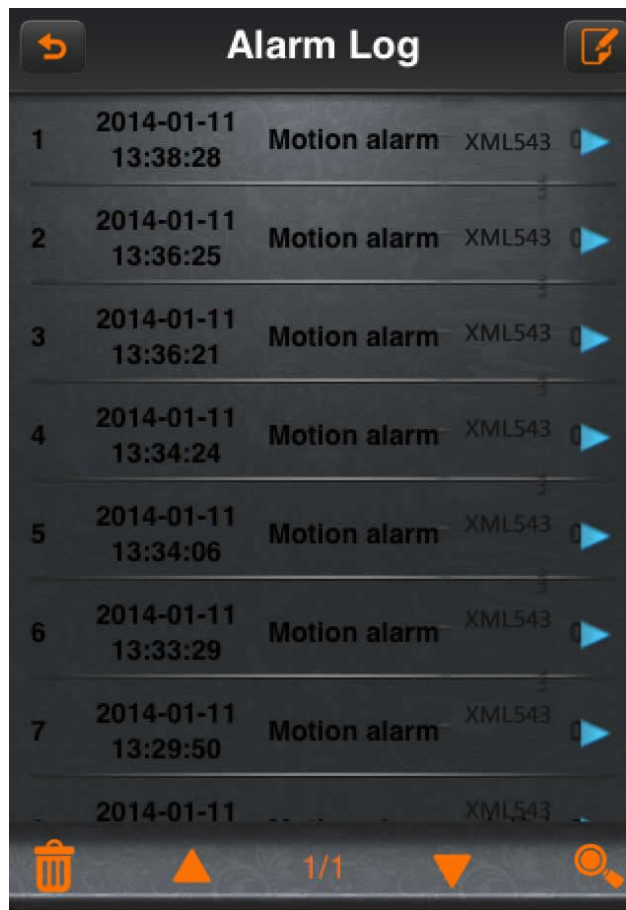


The icons instruction

Icon	Function instruction
	return to the alarm management
	search the alarm record
	page up
	page down

§2.8 Local playback

Click on “local playback” option in the main menu, and then into the interface as follows

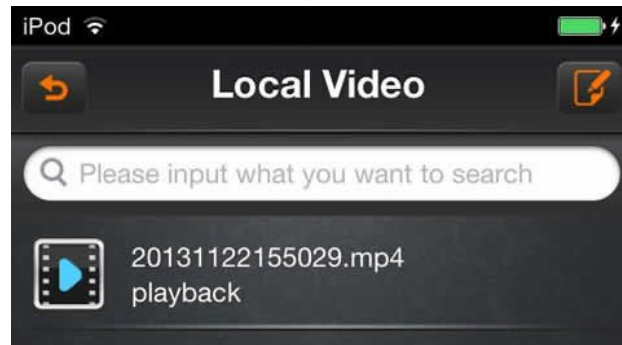

Click on the icon , the local playback video list change to editing states.



Select the video options that you want to delete, and then click the button "delete"; you can delete the selected local video.

§2.9 Image view

Click on "images browsing" option



Click on the icon , the local playback video list change to editing states.



Select the image options that you want to delete, and then click on the button delete to delete the selected local images.

§2.10 Modify password


Click on” modify password” option in the main menu, and then into the interface as follows:



Click on the icon  to save the current modified password.

§2.11 Local configuration

Click on “local configuration” option in the main menu, and then into the interface as follows

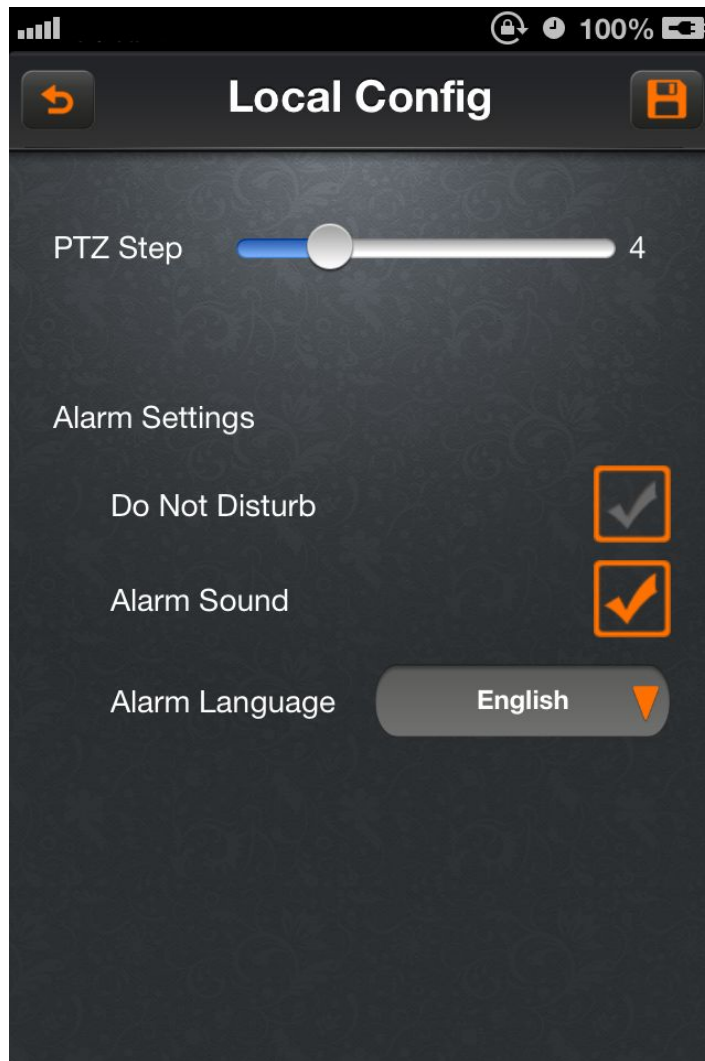

Function instruction:

Function	Instruction
PTZ length	The camera rotation rate setting
Do not disturb	Alarm Info Tips switch
Alarm voice	Close the alarm voice
Alarm languagece	Alarm push language

Click on the icon  to save the current configuration.